


# TAPERED ELLIPTICAL ALUMINUM BRACKETS (TEA)

## Aluminum Street Light Arms

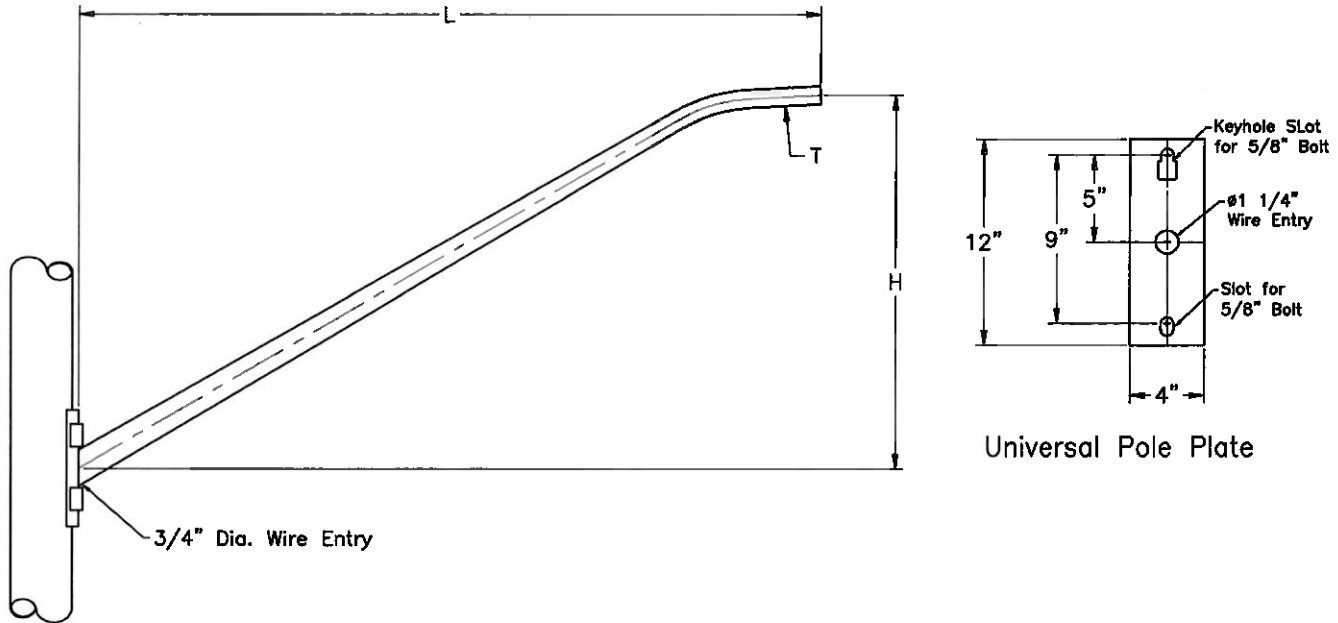

Catalogue No.	Length (L)	Height (H)	Taper (T)	Wall (W)
RE4M	4'-0"	2'-0"	3 1/2" - 2 3/8"	.120"
RE6M	6'-0"	3'-0"	3 1/2" - 2 3/8"	.120"
RE6-MTO	6'-0"	3'-0"	3 1/2" - 2 3/8"	.188"
RE8	8'-0"	4'-0"	3 1/2" - 2 3/8"	.125"
RE8M	8'-0"	4'-0"	4" - 2 3/8"	.125"
RE8-MTO	8'-0"	4'-0"	4" - 2 3/8"	.188"

### Notes:

1. Aluminum Alloy 6063 heat treated to T6 after welding,
2. All Welding per CSA/ CWB W47.1 and W47.2,
3. Polished Natural Finish,
4. Arms can be used for all types of mounting applications, on aluminum, steel, concrete, fiberglass or wood poles,
5. Reference OPSP 2420.01,

www.ewinggroup.com 905-666-5600  
RRR- Tapered Elliptical Aluminum Street Light Arms